

Drag coefficient of finite cylinder at moderate Reynolds number and its implementation to fibre model

Grzegorz Kondora, Dariusz Asendrych
kondora@imc.pcz.czest.pl, darek@imc.pcz.czest.pl

Institute of Thermal Machinery, Czestochowa University of Technology
al. Armii Krajowej 21, 42-201 Czestochowa, Poland

Keywords: Fibre suspension, papermaking, drag coefficient, particle-level simulation

Abstract

In papermaking the modelling of fibre suspensions is of great importance. When the properties of final product are to be predicted the knowledge about fibres behaviour, in particular fibres orientation, is required. With Lagrangian approach, the most adequate simulation technique, single fibre is modelled as a chain of segments, which may be represented by either cylinders or prolate spheroids or, in the simplest case, spheres. The choice of element shape is determined by the desired fibre model properties as well as computational performance. When spheres are used to discretize the fibre, drag force distribution may be easily implemented from literature. However, with this segment shape one may expect huge computational cost (proportional to the number of segments) as well as the problems with fibres overlapping and collision detection. These problems may be overcome when fibre is constructed from cylinders. However, for isolated cylindrical particle drag force coefficient becomes a function of orientation angles (Fig. 1a) and these relationships are unknown (except for creeping flow conditions, i.e. $Re \ll 1$).

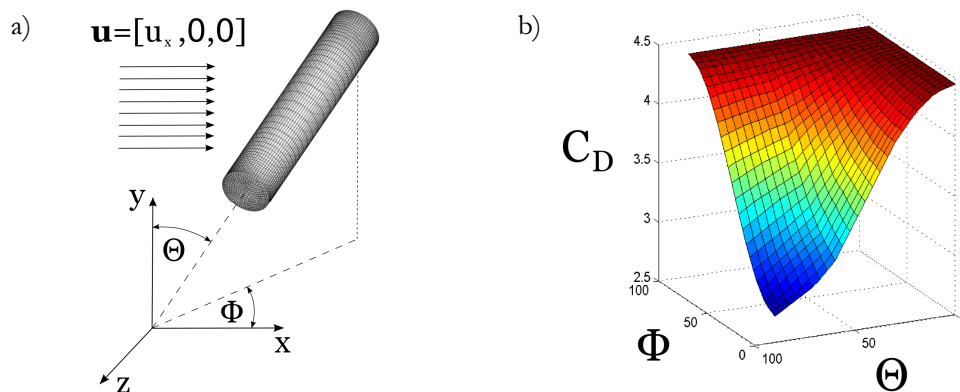


Fig.1. Orientation angles definition (a) and drag force coefficient vs orientation angles (b)

In present paper numerical algorithm has been developed enabling for detailed studies of drag force coefficient as a function of orientation angles, cylinder aspect ratio and Reynolds number. Automatic procedure allowed to generate numerical grid (Gambit) and then to conduct CFD calculations (Ansys Fluent). A sample distribution of drag force coefficient C_D for $Re=5$ is shown in Fig. 1b. The results were found to be fully consistent with available reference data [1].

Drag force and torque coefficients distributions were implemented to the previously developed Lagrangian fibre model and tested in simple shear flow. Results of simulations were compared with existing literature data including both computational as well as experimental ones.

Reference

1. Vakil, A. and Green, S. I.: Drag and lift coefficients of inclined finite circular cylinders at moderate Reynolds numbers. *Computers & Fluids* 2009; 38:1771–1781